

[Manuals.plus](#) /

› [Xiaomi](#) /

› Xiaomi Pocket Power Bank 10000mAh User Manual

Xiaomi P15ZM

Xiaomi Pocket Power Bank 10000mAh User Manual

Model: P15ZM

1. INTRODUCTION

This user manual provides comprehensive instructions for the safe and efficient operation of your Xiaomi Pocket Power Bank 10000mAh. Please read this manual thoroughly before using the product and retain it for future reference.



Image 1.1: The Xiaomi Pocket Power Bank 10000mAh, showcasing its compact size when held in hand.

2. SAFETY INFORMATION

To ensure safe operation and prevent damage, observe the following precautions:

- Do not disassemble, repair, or modify the power bank.
- Do not expose the power bank to fire, high temperatures (above 45°C), or direct sunlight.
- Avoid dropping, impacting, or subjecting the power bank to strong vibrations.
- Keep the power bank away from water, moisture, and corrosive substances.
- Use only certified charging cables and adapters.
- Keep out of reach of children.
- Dispose of the power bank responsibly according to local regulations.

12-layer safety



Overheat protection
(Ideal temperature: 0-35°C)



Short-circuit protection



Reset protection



Input overvoltage protection



Input overcurrent protection



Output overcurrent protection



Output overvoltage protection



Overcharge & overdischarge protection



Overcurrent & short-circuit protection



Metal foreign object detection



Electrostatic Protection



Chip Thermal Shutdown

Image 2.1: The power bank incorporates 12-layer safety protection, including overheat, short-circuit, and overcharge protection.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- Xiaomi Pocket Power Bank 10000mAh (with built-in USB-C cable)
- User Manual

4. PRODUCT OVERVIEW

Familiarize yourself with the components of your power bank:

Multi-port Access

Built-in Type-C cable

USB-A port


Type-C port



Image 4.1: Overview of the power bank's ports and indicators.

- **Built-in USB-C Cable:** For convenient charging and recharging without extra cables.
- **USB-A Output Port:** Standard USB port for charging devices.
- **USB-C Input/Output Port:** Versatile port for both charging devices and recharging the power bank.
- **Power Button/Battery Indicator:** Press once to check battery level. Double-tap to activate low-power mode.
- **LED Indicators:** Four LEDs indicate the remaining battery capacity.

10000mAh High-density Lithium-ion Battery

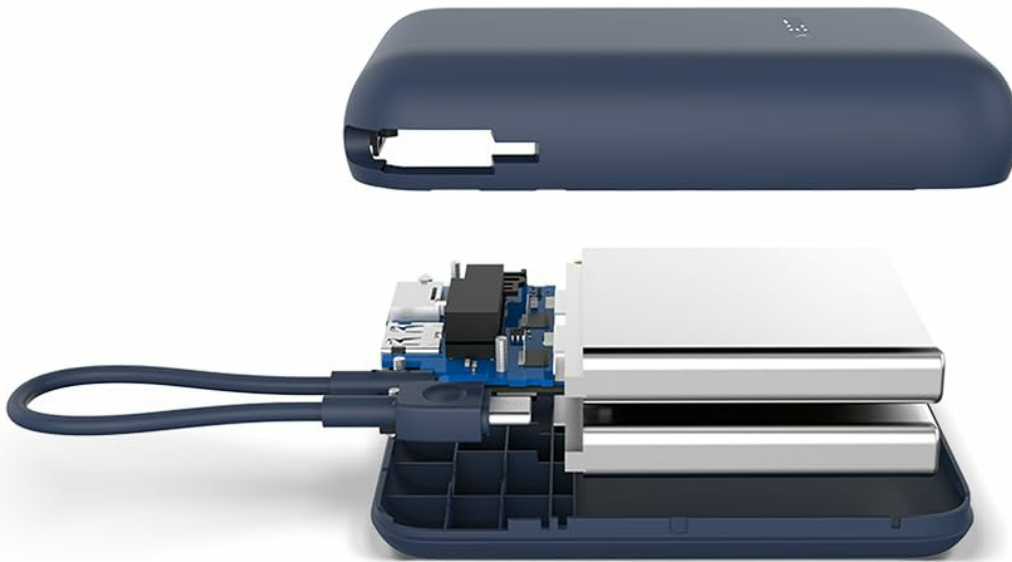

1.4 Times
charges
Xiaomi 14

1.76 Times
charges
Xiaomi 13 Pro

2.6 Times
charges
iPhone 15 Pro

Image 4.2: The durable built-in Type-C cable, designed for convenience.

5. SETUP

Before first use, it is recommended to fully charge your power bank.

5.1 Initial Charging of the Power Bank

1. Connect the built-in USB-C cable or an external USB-C cable to the power bank's USB-C input/output port.
2. Connect the other end of the cable to a compatible USB wall charger (not included).
3. The LED indicators will light up to show the charging progress. All four LEDs will be solid when fully charged.

A full charge typically takes approximately 3.5 hours with a 22.5W fast charger.

6. OPERATING INSTRUCTIONS

6.1 Charging Devices

The power bank supports charging up to three devices simultaneously.

1. Connect your device to the power bank using one of the following methods:
 - Use the built-in USB-C cable.
 - Connect a USB-A to your device's cable to the USB-A output port.
 - Connect a USB-C to your device's cable to the USB-C input/output port.
2. The power bank will automatically begin charging your device. If not, press the power button once.

Two-way fast charge

22.5W Type-C input and output

Fast-charge 22.5W
Input and Output



Fast-charge 22.5W
Input and Output

Power Delivery | Quick Charge 3.0

Image 6.1: The power bank can charge multiple devices simultaneously using its various ports.

6.2 Recharging the Power Bank

To recharge the power bank, follow the steps in Section 5.1.

6.3 Low-Power Mode for Small Devices

For charging low-current devices such as Bluetooth earbuds, smartwatches, or fitness bands, activate the low-power mode:

1. Ensure no devices are connected or disconnect them.
2. Double-tap the power button. The LED indicators will flash sequentially to indicate low-power mode is active.
3. Connect your low-current device. The power bank will provide a stable low-current output.
4. To exit low-power mode, double-tap the power button again, or simply connect a standard device.

Low Power Discharge Mode

Charge your ecosystem devices such as SmartWatches/Bands, earbuds/Neckbands, and any other smart device.



Image 6.2: Low-power mode is ideal for charging small electronic devices like smartwatches and earbuds.

7. MAINTENANCE

Proper maintenance ensures the longevity of your power bank:

- **Cleaning:** Use a soft, dry cloth to clean the surface of the power bank. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the power bank in a cool, dry place away from direct sunlight and extreme temperatures. If storing for extended periods, charge it to approximately 50% every three months to preserve battery health.
- **Cable Care:** Avoid excessive bending or pulling of the built-in cable to prevent damage.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Power bank not charging devices.	Low battery; cable issue; device incompatibility.	Recharge power bank; try a different cable; ensure device is compatible.
Power bank not recharging.	Faulty charger/cable; power bank issue.	Try a different charger and cable; contact support if issue persists.
Slow charging.	Non-fast charging cable/adaptor; device not supporting fast charge.	Use a fast-charging compatible cable and adaptor; check device's charging specifications.
LED indicators not working.	Power bank is off or completely discharged; internal fault.	Press power button; recharge power bank; contact support.

9. SPECIFICATIONS

Feature	Detail
Model Number	P15ZM
Battery Capacity	10000 mAh
Input (Type-C)	22.5W Max (Two-way fast charging)
Output (Built-in Type-C, USB-A, Type-C)	22.5W Max (Power Delivery, Quick Charge 3.0)
Dimensions	33 x 18.4 x 3.7 cm (Package)
Weight	230 g
Battery Type	Lithium Ion
Safety Features	12-layer protection (Overheat, Short-circuit, Overcharge, etc.)
Color	Blue

Built-in Type-C Cable

22.5W Fast Charge



Xiaomi 14

50% Charge in
32 mins

Xiaomi 13 Pro

50% Charge in
34 mins

iPhone 15 Pro

50% Charge in
35 mins

Image 9.1: Fast charging capabilities, showing approximate charge times for various devices.

10. WARRANTY AND SUPPORT

Your Xiaomi Pocket Power Bank 10000mAh comes with a **1-year manufacturer warranty** from the date of purchase. For warranty claims, technical support, or any product-related inquiries, please contact Xiaomi customer service:

- **Manufacturer:** TOPBAND India Pvt Limited, Khed, Khalumbre Pune 410501, India
- **Importer:** Xiaomi Technology India Pvt Ltd, Ground Floor, AKR Infinity, SY, No 113, Krishna Reddy Industrial area, 7th Mile, Hosur Road, Bangalore 560068, Karnataka, India
- **Phone No:** 1800 103 6286 (Available from 9 AM to 9 PM)
- **Email:** Service.in@xiaomi.com

Please retain your purchase receipt as proof of purchase for warranty purposes.

