

## **NOTES:**

- 1. MATERIAL- ART PAPER 60±10 GSM
- 2. SAMPLES SHOULD BE APPROVED FOR GRAPHICS AND COLOUR BY R&D DEPT. BEFORE MASS PRODUCTION.
- 3. ANY CHANGE IN GRAPHICS & COLOUR SHOULD BE DONE WITH PRIOR PERMISSION FROM R&D DEPT.
- 4. REQUIRED WITH POLY BAG (POLYBAG SPECIFICATION SHOULD BE AS PER PART CODE **0060526539H** )
- 6. ACCORDING TO STANDARD EN 50581 OF EU THE PART SHOULD NOT CONTAIN PROHIBITED SUBSTANCES(Pb,Cd,Hg,Cr+6,PBB's,PBDE's, DEHP,BBP,DBP,DIBP)

ABOVE THE ROHS PERMISSIBLE LIMIT.

(PBB's) (PBDE'S) (DEHP) (DBP) (DIBP) (BBP) |<1000ppm| <100ppm |<1000ppm|<1000ppm|<1000ppm|<1000ppm|<1000ppm|<1000ppm|<1000ppm|<1000ppm|

\*(Pb) : Aluminium - 4000ppm (0.4% lead by weight) Galvanised Stee - 3500ppm (0.35% lead by weight) - 40000ppm (4% lead by weight) Copper

## PACKING STANDARD:

AND APPROVAL BY HAIER R&D DEPT.

XXXXXXX

1. MAKE THE BUNDLE 100 ~ 1000 NOS AND TIE IT BY THREAD. 2.10 NOS BUNDLES ARE SUPPLY IN APPROPRIATE CARTON BOX. 3.QUANTITY TO BE MENTION ON EVERY BUNDLE & CARTON BOX. 4.BOX SHOULD NOT BE WEAR AND TEAR WHILE TRANSPORTATION

**REV. No. 00** DATE -


							GRA!
							H
AMMD	ECN No.	LOC	DESCRIPTION	DATE	ISSUED BY	APPROVED BY	


PIICS aier


	LIBRARY CHECKED	TRIG.	UNIT -	m	m	SC	CALE : N/S		
		DESIGNED	REVIEWED	CHECKED		ΕD	APPROVED		T
								_ ¦ _ ⊤	T
								L	
								E	-
			RELATED DWG.			D	WG.		
HAIER INDIA APPLIANCES PVT. LTD.									


USER MANUAL DC COMMON HAIER

0060529097A

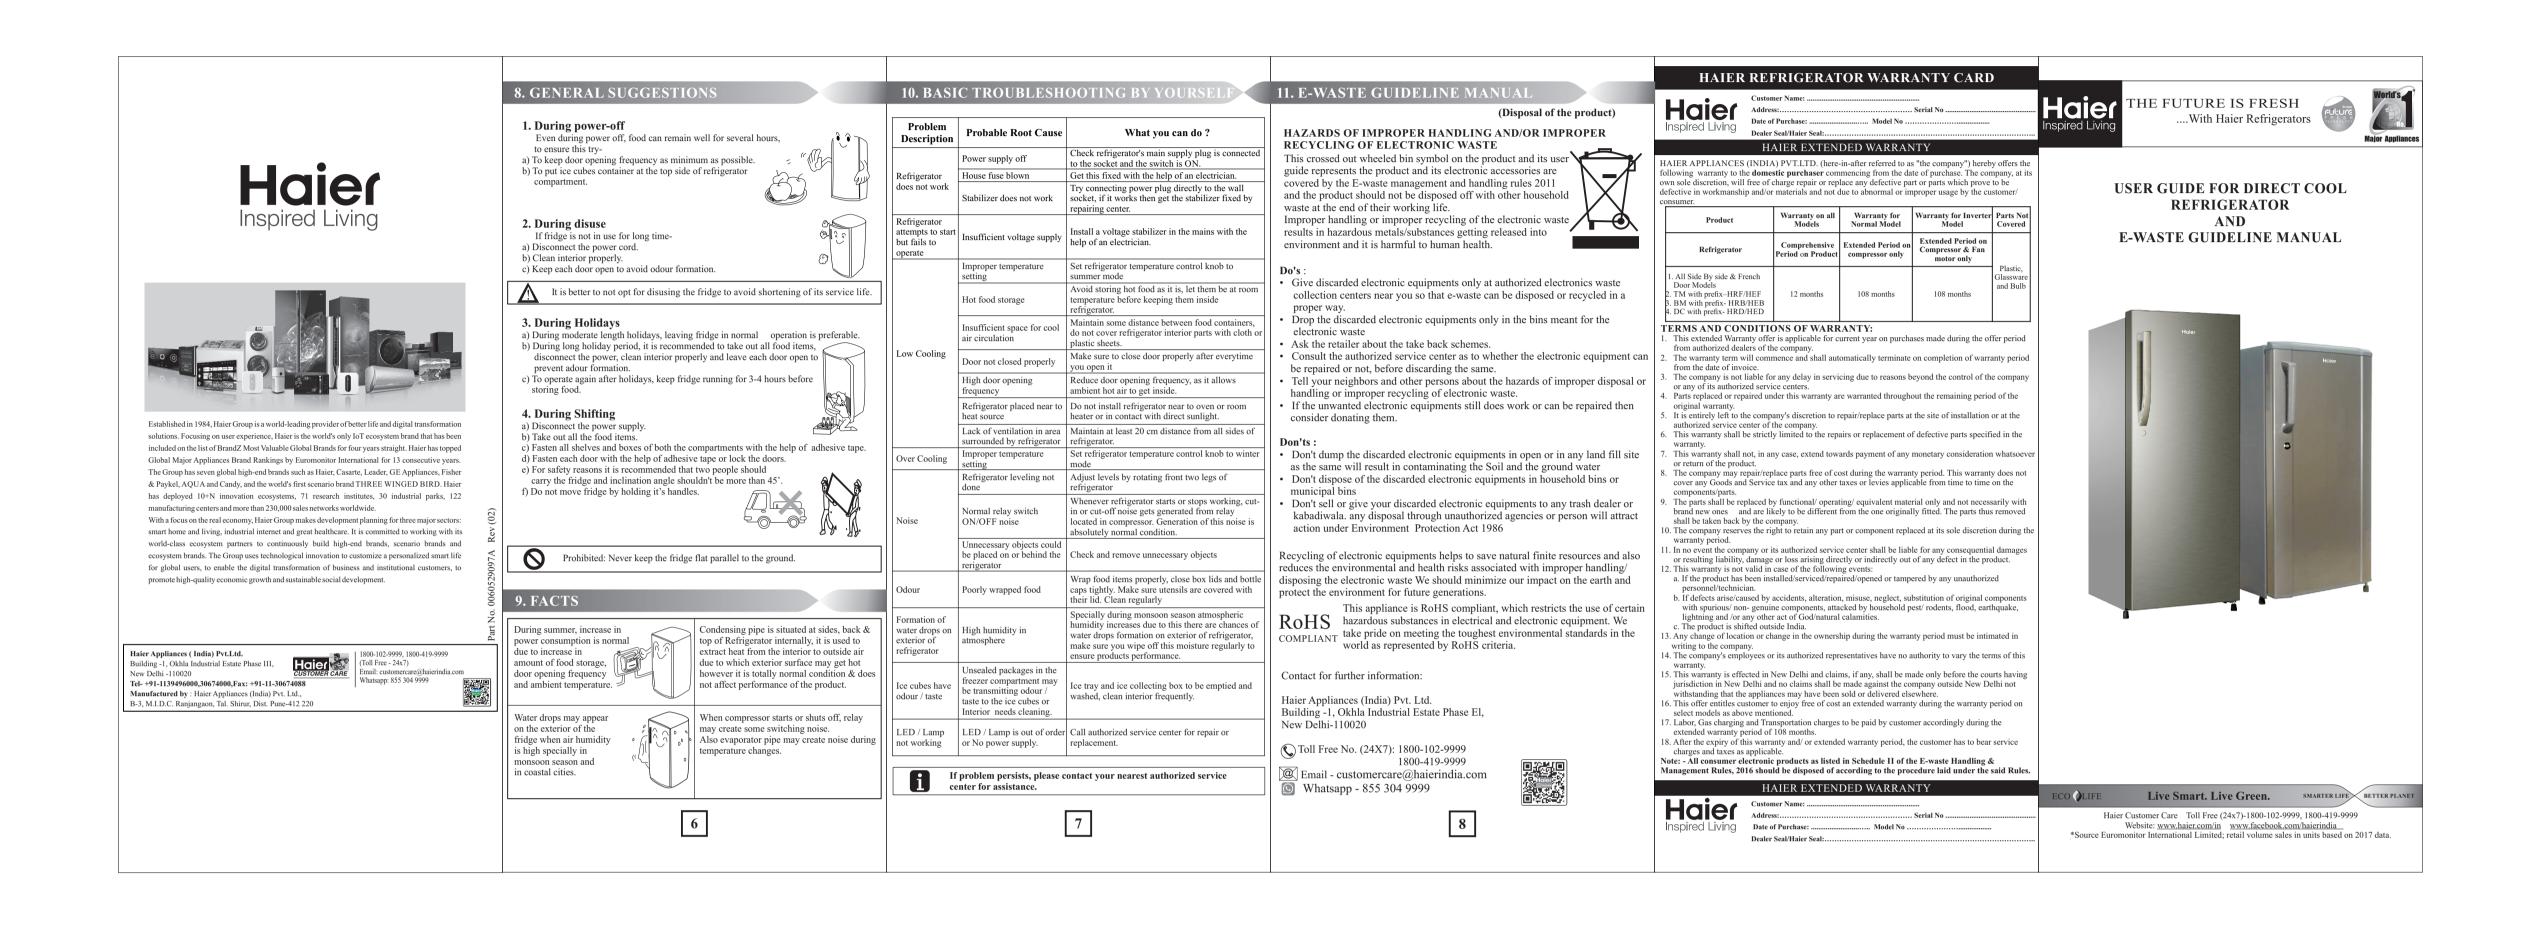

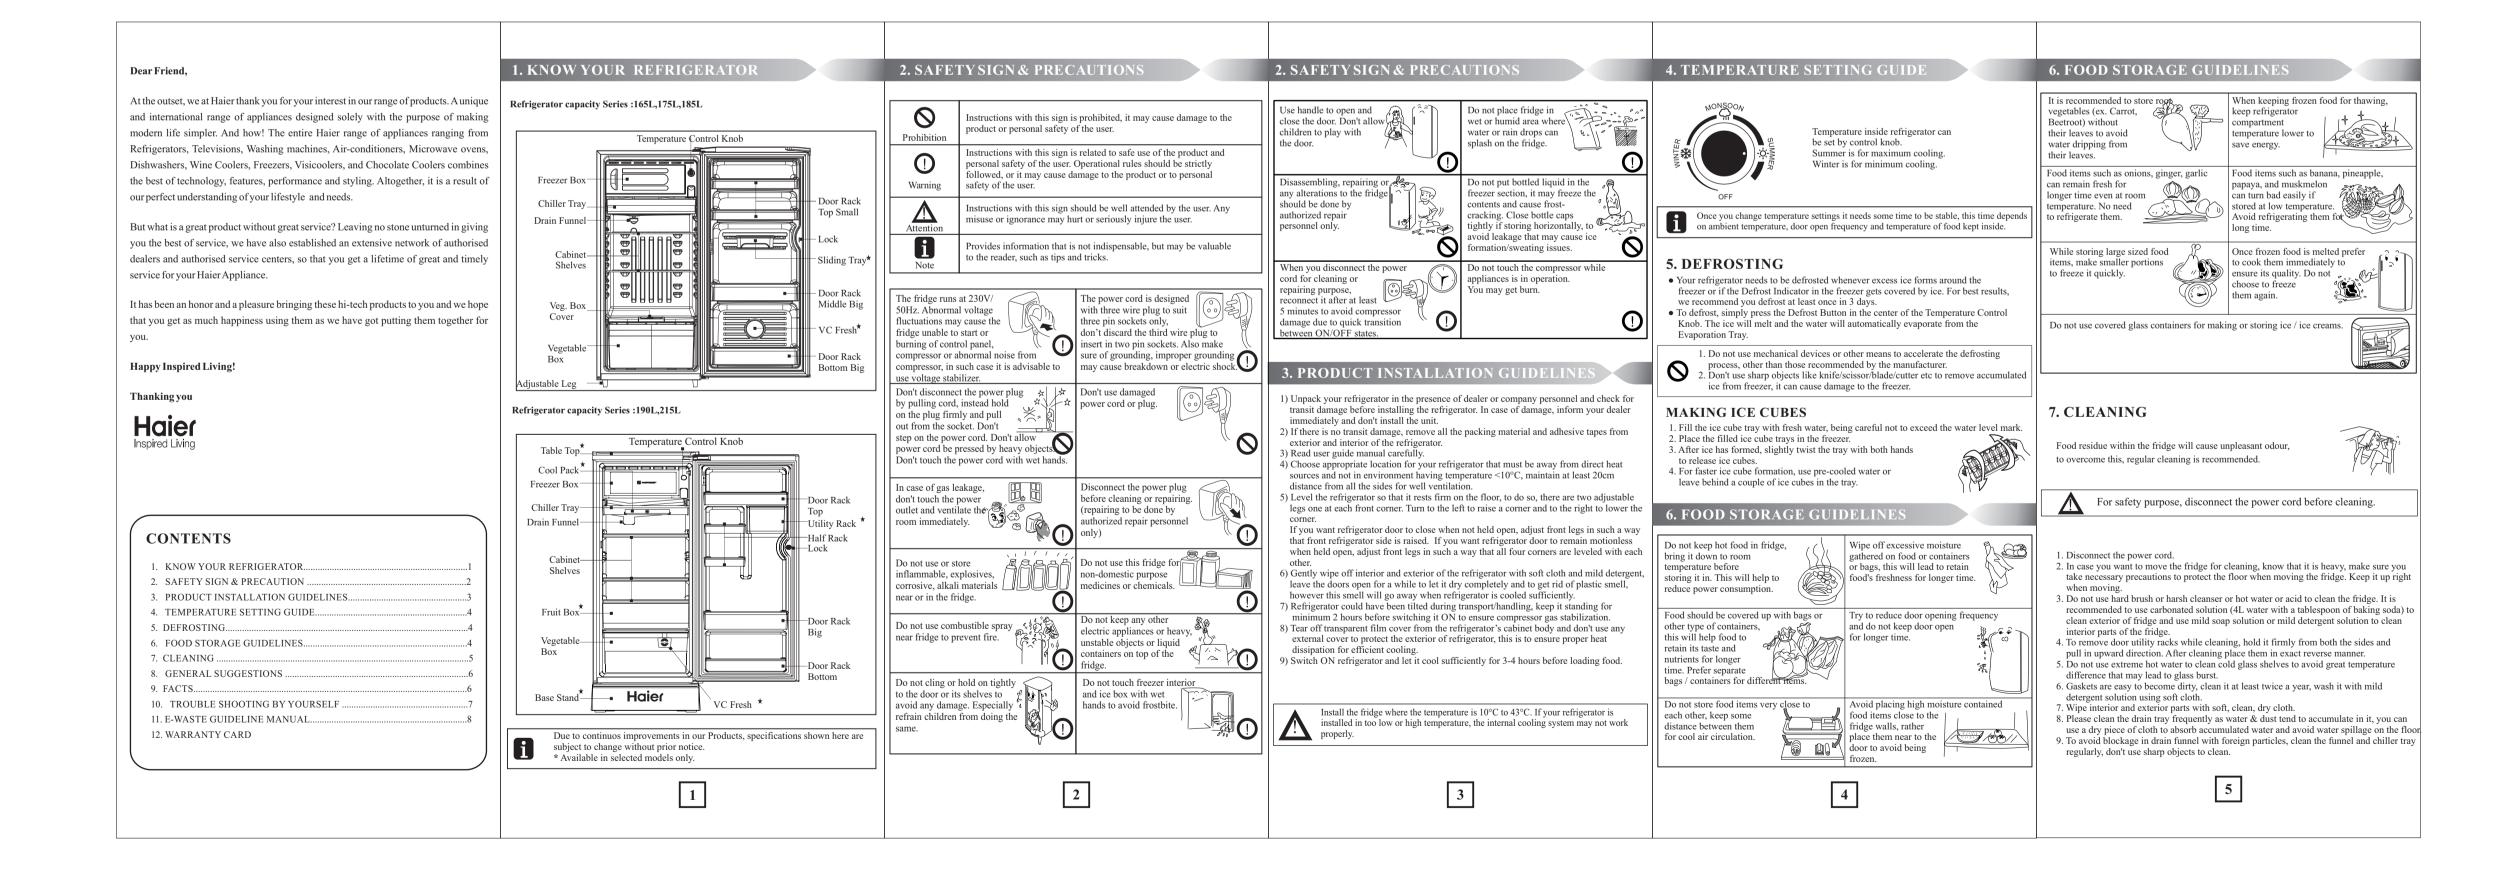

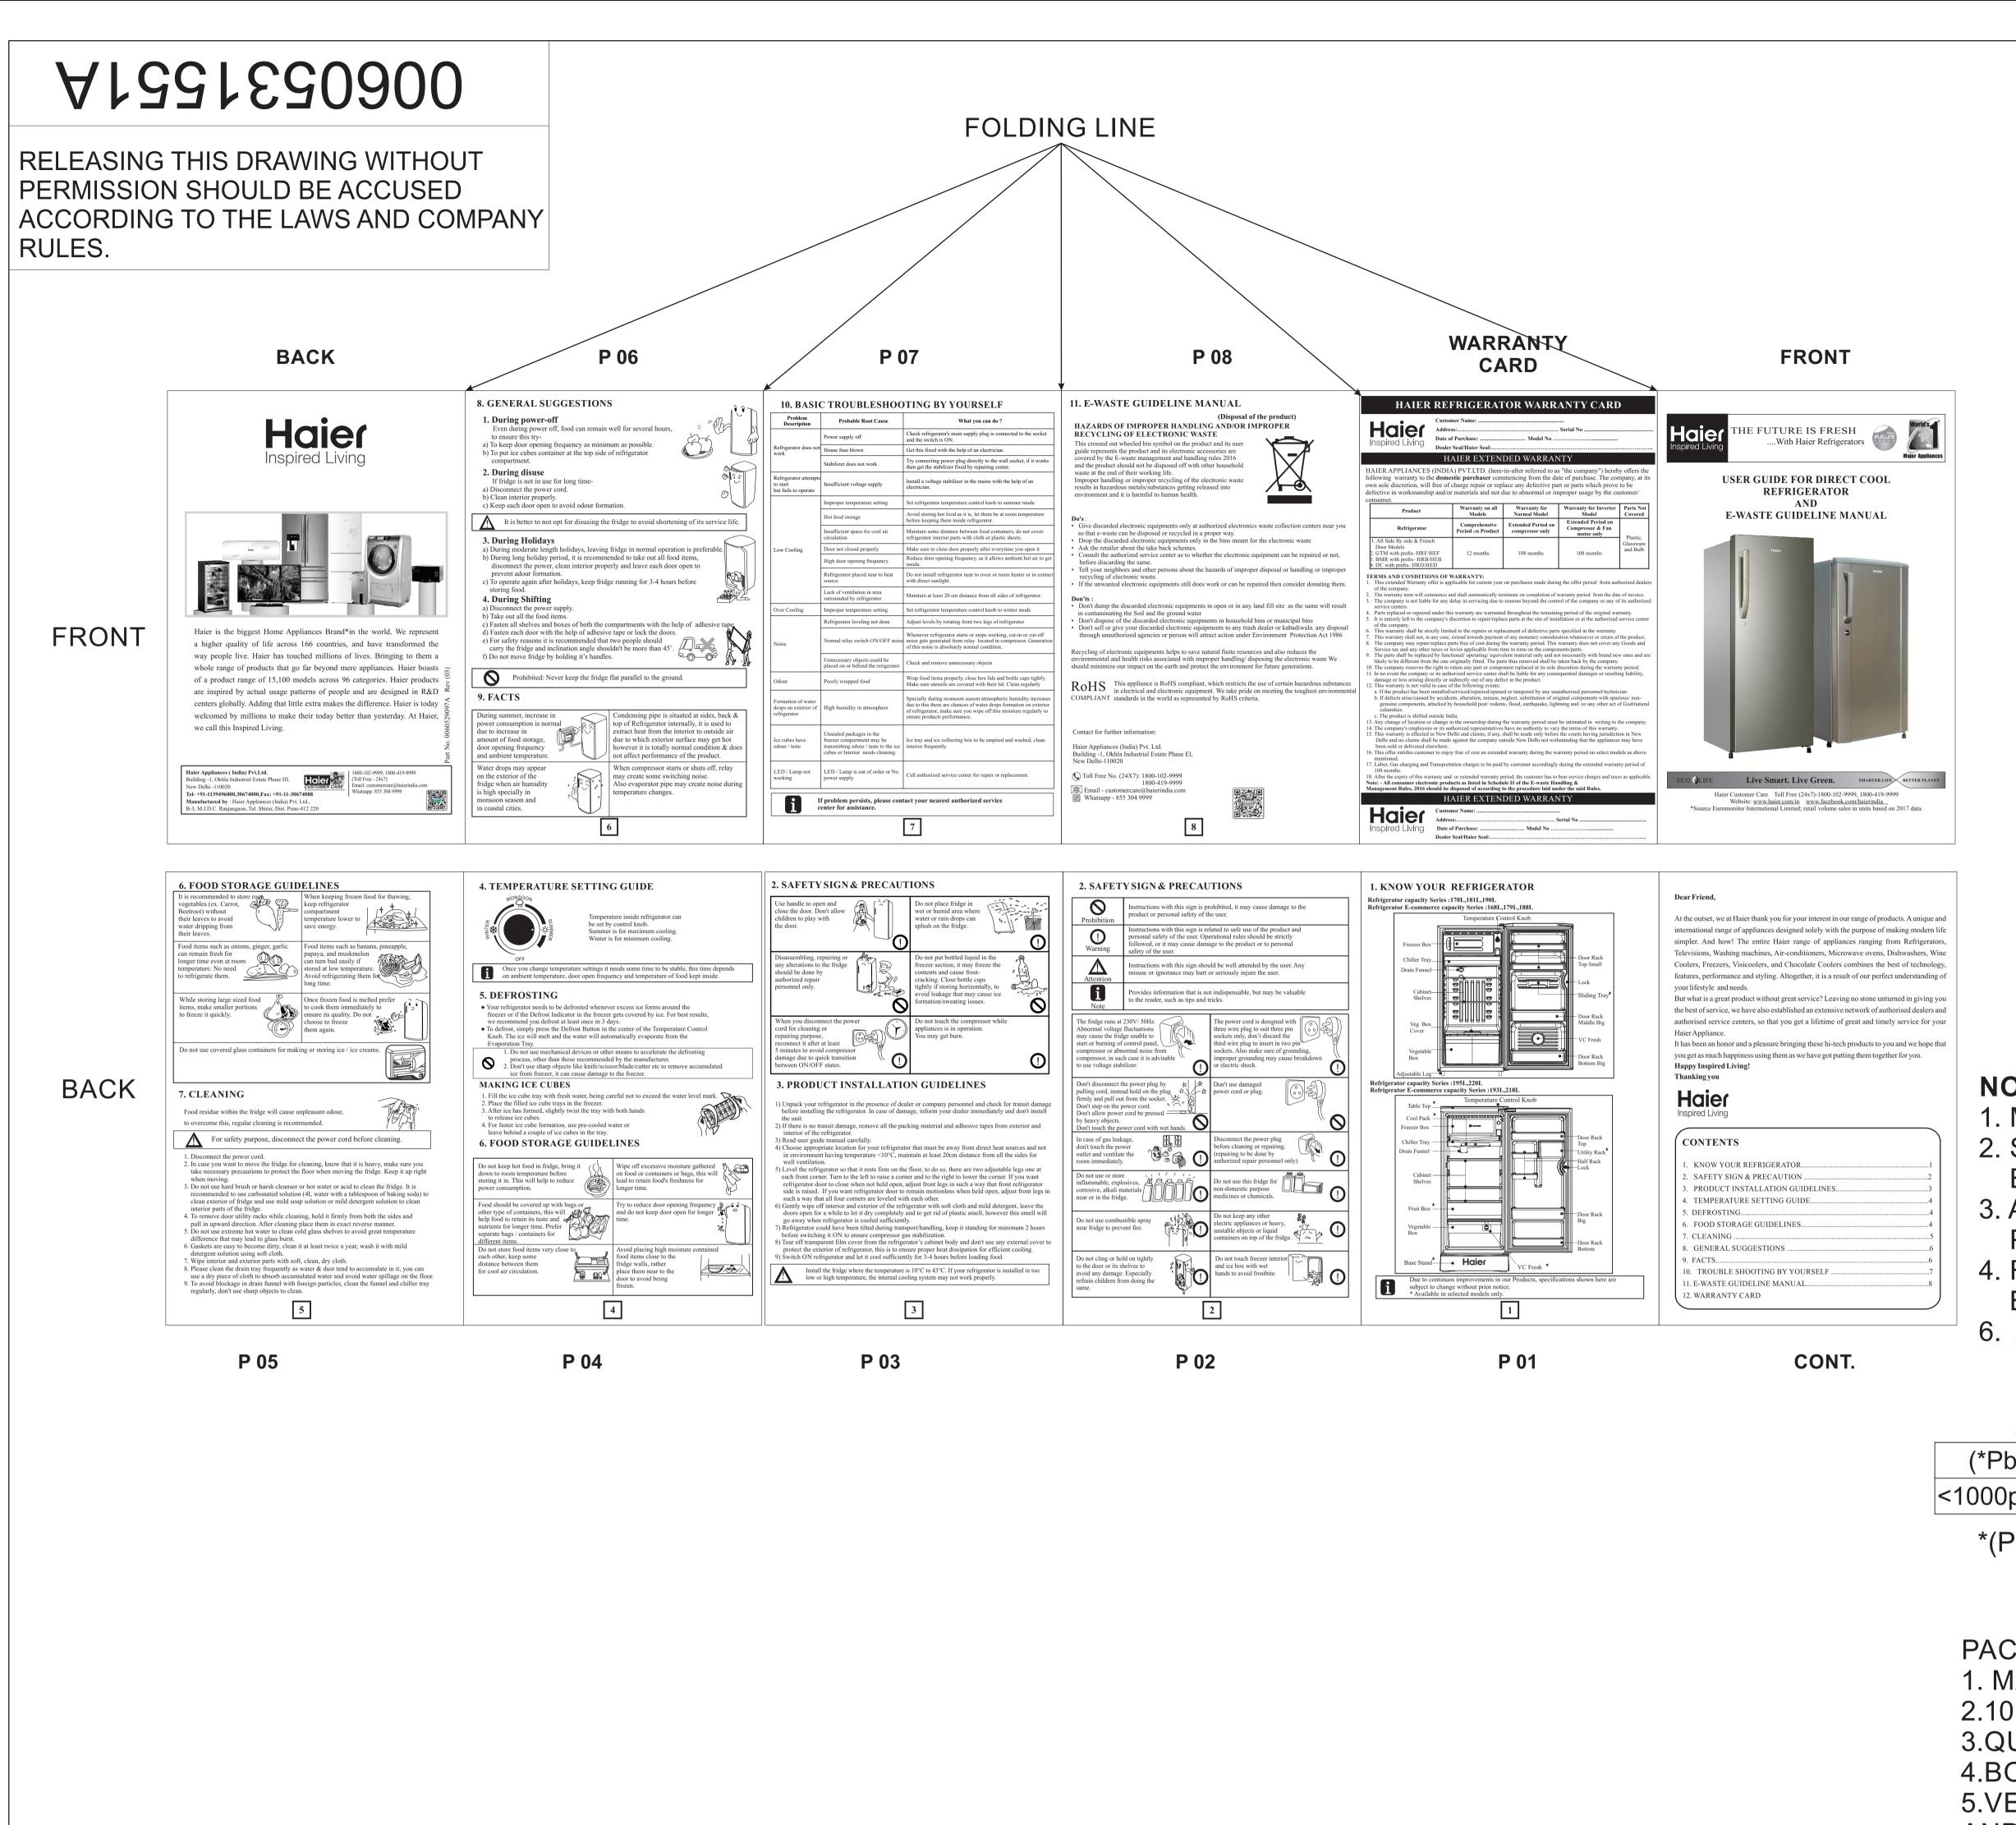

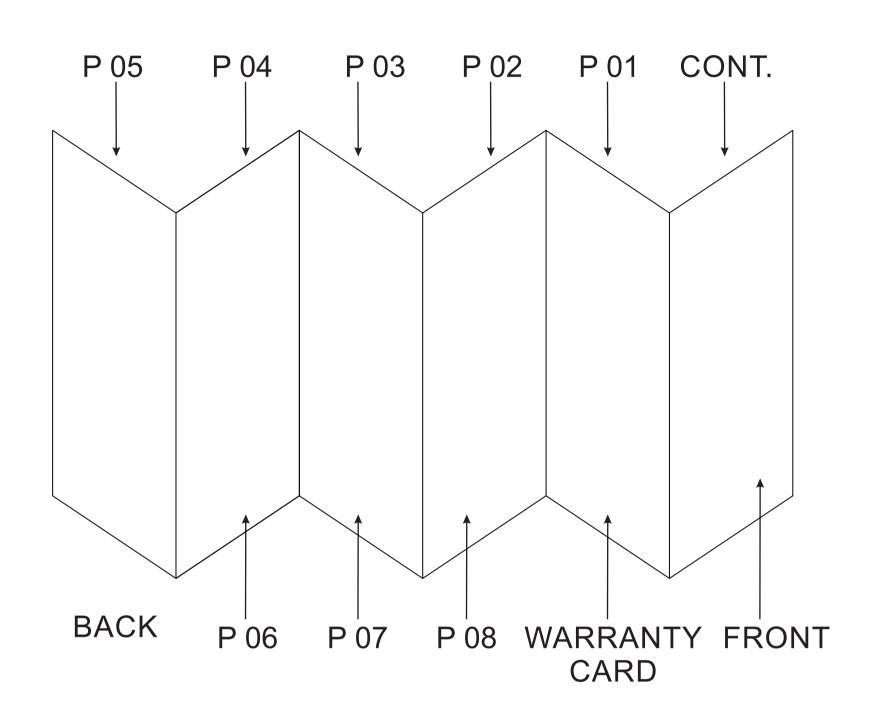

## **NOTES:**

- 1. MATERIAL- ART PAPER 60±10 GSM
- 2. SAMPLES SHOULD BE APPROVED FOR GRAPHICS AND COLOUR BY R&D DEPT. BEFORE MASS PRODUCTION.
- 3. ANY CHANGE IN GRAPHICS & COLOUR SHOULD BE DONE WITH PRIOR PERMISSION FROM R&D DEPT.
- 4. REQUIRED WITH POLY BAG (POLYBAG SPECIFICATION SHOULD BE AS PER PART CODE **0060526539H** )
- 6. ACCORDING TO STANDARD EN 50581 OF EU THE PART SHOULD NOT CONTAIN PROHIBITED SUBSTANCES(Pb,Cd,Hg,Cr+6,PBB's,PBDE's, DEHP,BBP,DBP,DIBP)

ABOVE THE ROHS PERMISSIBLE LIMIT.

XXXXXXX

 (\*Pb)
 (Cd)
 (Hg)
 (Cr+6)
 (PBB's)
 (PBDE'S)
 (DEHP)
 (BBP)
 (DBP)
 (DIBP)

 <1000ppm</td>
 <1000ppm</td>

\*(Pb) : Aluminium - 4000ppm (0.4% lead by weight)
Galvanised Stee - 3500ppm (0.35% lead by weight)
Copper - 40000ppm (4% lead by weight)

## PACKING STANDARD:

1. MAKE THE BUNDLE 100 ~ 1000 NOS AND TIE IT BY THREAD.
2.10 NOS BUNDLES ARE SUPPLY IN APPROPRIATE CARTON BOX.
3.QUANTITY TO BE MENTION ON EVERY BUNDLE & CARTON BOX.

4.BOX SHOULD NOT BE WEAR AND TEAR WHILE TRANSPORTATION 5.VENDOR WILL IMPROVE THE PACKING WITH CONCERN AND APPROVAL BY HAIER R&D DEPT.

REV. No. 00 DATE -

						CHAPRICS
						Haier
AMMD	ECN No.	LOC	DESCRIPTION	DATE	ISSUED BY APPROVED BY	

	LIBRARY	TRIG.	UNIT -		m	SC	CALE : N/S			
		DESIGNED	REVIEWED	CHECKED		ED	APPROVED	) T		
)								│		
								Ĺ		
								E		
		TED DWG.	DW	DWG.						
	HAIER INDIA		\/\/\/\/\/							

USER MANUAL DC COMMON CANDY

0060531551A

