



Manuals.plus / > **VIVO** / > VIVO V60 5G Smartphone User Manual

VIVO V60

Sign in to save this manual

Sign in to bookmark this manual and keep private notes.

VIVO V60 5G Smartphone User Manual

Model: V60 | Auspicious Gold, 8GB RAM, 256GB Storage

[Device](#) [Maintenance](#) [Setup](#) [Operating Your](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

INTRODUCTION

This manual provides comprehensive instructions for setting up, operating, maintaining, and troubleshooting your VIVO V60 5G smartphone. Please read this manual carefully to ensure proper use and to maximize the device's capabilities. Keep this manual for future reference.



Image: Front and rear view of the VIVO V60 5G smartphone in Auspicious Gold. The device features a sleek design with a prominent camera module on the back and a full-screen display on the front.

1. SETUP

1.1 What's in the Box

Upon unboxing your VIVO V60 5G, verify that all standard accessories are present:

- VIVO V60 5G Smartphone
- USB Cable
- Power Adapter (90W Flash Charge compatible)
- SIM Tray Ejector

- Phone Case
- Screen Protector (pre-applied or included)

1.2 Initial Device Setup

1. **Insert SIM Card(s):** Use the provided SIM tray ejector tool to open the SIM card slot. Insert your 5G-compatible Nano-SIM card(s) into the tray. The V60 5G supports 5G + 5G Dual SIM Dual Standby. Ensure the SIM card is correctly oriented as indicated on the tray.
2. **Power On:** Press and hold the Power button located on the side of the device until the VIVO logo appears.
3. **Initial Configuration:** Follow the on-screen prompts to select your language, connect to a Wi-Fi network, set up your Google account, and configure security features such as the in-display optical fingerprint sensor.


1.3 Charging the Battery

The VIVO V60 5G is equipped with a 6500 mAh Li-ion battery and supports 90W Flash Charge technology for rapid charging.

- Connect the USB cable to the phone's USB-C port and the other end to the 90W Power Adapter.
- Plug the power adapter into a wall outlet.
- The charging indicator will appear on the screen. For optimal charging speed, use only the original VIVO 90W Flash Charge adapter and cable.

India's Slimmest Smartphone in the 6500mAh Battery Category*

6500mAh

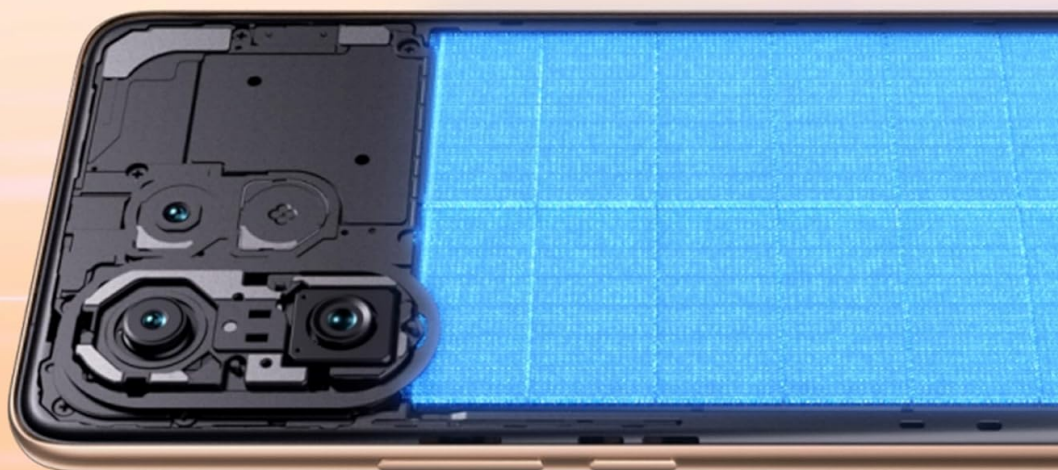

90W FlashCharge**

*vivo v60 (mist gray version with thickness 0.753cm) is the slimmest smartphone in 6500mAh battery category, according to internal research as of 11.07.2025. | **V60 is equipped with vivo standard charger, and supports up to 90W of charging power, subject to actual use and various external factors including electricity output.

Image: An internal view of the VIVO V60 5G highlighting its 6500mAh battery capacity and 90W FlashCharge capability. This illustrates the phone's robust power system.

2. OPERATING YOUR DEVICE

2.1 Display and User Interface

The VIVO V60 5G features a 17.20 cm (6.77-inch) Slim Quad Curved AMOLED capacitive multi-touch display with a 120 Hz refresh rate. It supports P3 wide color gamut and offers 5000 nits peak local brightness for an ultra-bright viewing experience. The display is certified by SGS for Low Blue Light, reducing eye strain.



*vivo disclaims all warranty for accuracy and shall not be responsible for the results and results may vary basis experience and usage.
 †This product has been tested under controlled laboratory conditions, provides protection against tight dust, continuous immersion in water and high pressure and temperature water jets and is rated as IP68 and IP69 under IEC standard 60529-2013.
 IP68 water resistance test conditions: Submerged in static fresh water up to 1.5 meters for up to 120 minutes, with a temperature difference between the water and the device of less than 5°C. IP69 water resistance test conditions: A rotation speed of (5±1) rpm, nozzle angles of 0°, 30°, 60°, and 90°, a flow rate of (15±1) L/min, a water temperature of (80±5)°C, a test time of 30s/position, and the phone placed in a vertical position with the USB port facing down. This product is not a professional waterproof phone. The resistance to water, water jets and dust is not permanent and may be reduced with daily use. Do not immerse the phone in water during daily use or expose it to solutions such as seawater or other liquids such as beverages. Do not charge the phone when it is wet; instead, clean and dry it immediately. Damage caused by liquid ingress is not covered by warranty. | ‡The tests were conducted under controlled conditions in vivo labs. Since mobile phones are precision electronic devices, there is still a risk of damage from drops. Please be careful to avoid dropping the phone or subjecting it to any form of impact.

Image: Visual representation of the VIVO V60 5G's display specifications including 5000 nits brightness and 120 Hz refresh rate, alongside its IP68 & IP69 water resistance, AI features, and full-body drop protection.

2.2 Camera Features

The VIVO V60 5G is equipped with an advanced ZEISS co-engineered camera system, offering versatile photography and videography options.

• Rear Camera System:

- 50 MP ZEISS OIS Main Camera (f/1.88, FOV 84°, 6P lens)
- 50 MP ZEISS Super Telephoto Camera (AF, OIS, f/2.65, FoV 33.1°, 4P lens, supports 10X Telephoto Stage Portrait)
- 8 MP ZEISS Ultra Wide-Angle camera (f/2.0, FoV 120° ± 3, 5P lens)

- **Front Camera:** 50 MP ZEISS Group Selfie Camera (AF, f/2.2, FoV 92° ± 3°, 5P lens)

- **Video Recording:** Supports 4K, 1080P, and 720P video recording resolutions.
- **Scene Modes:** Includes Photo, Portrait, Night, Video, Micro Movie, High resolution, Pano, Ultra HD Document, Slo-mo, Time-lapse, Supermoon, Astro, Pro, Snapshot, Food, Underwater Photography, Dual View, Film Camera.
- **ZEISS Multifocal Portrait:** Offers various focal lengths (e.g., 100mm Planar, 85mm Sonnar, 50mm Biotar, 35mm B-Speed, 23mm Distagon) for professional portrait effects.
- **India's Exclusive Wedding vLog:** A dedicated feature for capturing wedding moments.



Image: Detailed breakdown of the VIVO V60 5G's camera system, emphasizing the 50MP ZEISS Super Telephoto, 50MP ZEISS Group Selfie, and 50MP ZEISS OIS Main Cameras.

ZEISS Multifocal Portrait



100mm (Planar)



85mm (Sonnar)



50mm (Biotar)



35mm (B-Speed)



23mm (Distagon)

Image: Examples of ZEISS Multifocal Portrait mode on the VIVO V60 5G, showcasing different focal lengths (100mm, 85mm, 50mm, 35mm, 23mm) and their effects on portrait photography.



¹India's exclusive wedding vlog feature refers that V60, as of 11.07.2025, is the 1st smartphone to have a dedicated independently developed Wedding vLog Feature.

²The 50MP front selfie camera produces 50MP photos in High Resolution mode, and pixels may vary in other shooting modes. Please take actual pixels as standard. The camera is able to capture 90° photos after accounting for distortion for 50MP ZEISS Group Selfie Camera.

Image: Collage illustrating key camera features of the VIVO V60 5G, including India's Exclusive Wedding vLog, Ultra-Clear 4K Video capabilities, 10X Telephoto Stage Portrait, and the high-resolution 50MP ZEISS Group Selfie Camera.

2.3 Performance and Software

The VIVO V60 5G is powered by the Snapdragon 7 Gen 4 Mobile Platform, built on a 4 nm process node, ensuring efficient and powerful performance. It runs on FunTouch OS 15, providing a smooth and intuitive user experience. This variant comes with 8GB RAM and 256GB Internal Memory (LPDDR4X, UFS 2.2).

2.4 AI Features and Connectivity

The device integrates advanced AI capabilities and connectivity options:

- **AI Personal Assistant:** Includes AI Captions and AI Smart Call Assistant for enhanced communication and accessibility.

- **Google Gemini Integration:** Connected Apps & Gemini Live for intelligent assistance.
- **Connectivity:** Bluetooth 5.4, USB 2.0, and 5G + 5G Dual SIM Dual Standby.

vivo V60

with  Google Gemini

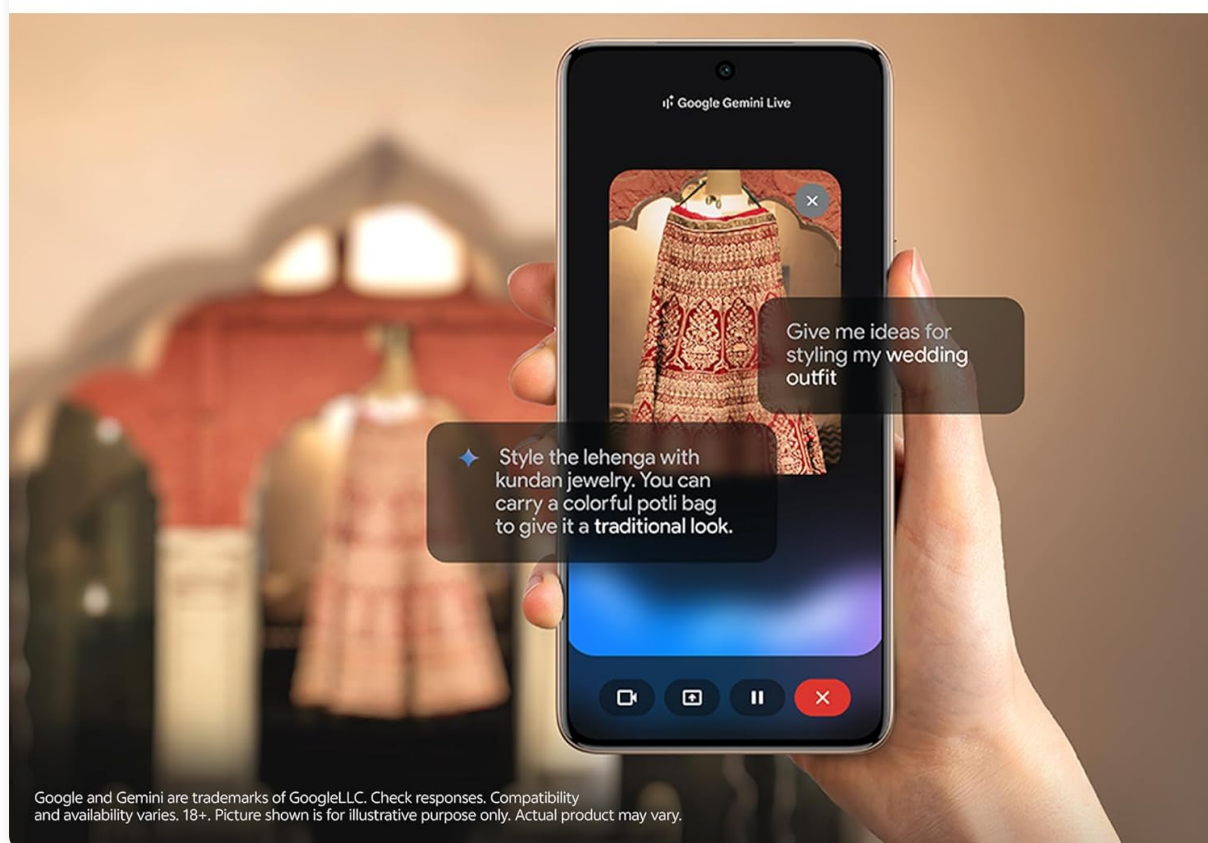


Image: The VIVO V60 5G showcasing its integration with Google Gemini, demonstrating smart assistance features.

2.5 Security

For maximum data security, the VIVO V60 5G features an in-display optical fingerprint sensor, allowing for quick and secure unlocking of your device.

3. MAINTENANCE

3.1 Water and Dust Resistance (IP68 & IP69)

The VIVO V60 5G boasts top-grade IP68 and IP69 water resistance, allowing it to be submerged in still fresh water up to 1.5 meters deep for up to 120 minutes. It also features a One-Tap Water Ejection function.

Important Note: *Water and dust resistance are not permanent conditions and may decrease over time with normal wear. Do not charge the phone when it is wet. Damage caused by liquid immersion is not covered under warranty if conditions are violated. Avoid exposing the device to saltwater, chlorinated water, or other liquids. If the device gets wet, wipe it thoroughly with a clean, soft cloth before charging or use.*

3.2 Drop Protection

The device is designed with Full-Body Drop Protection to enhance durability against accidental drops. While robust, extreme impacts can still cause damage. It is recommended to use the provided phone case for additional protection.

3.3 General Care and Cleaning

- **Cleaning:** Use a soft, lint-free cloth to clean the screen and body of the phone. Avoid abrasive materials or harsh chemicals.
- **Temperature:** Operate the device within recommended temperature ranges. Avoid exposing it to extreme heat or cold.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and moisture when not in use for extended periods.

4. TROUBLESHOOTING

This section addresses common issues you might encounter with your VIVO V60 5G. For more complex problems, please refer to the VIVO official support channels.

4.1 Common Issues and Solutions

Problem	Possible Cause	Solution
Device does not power on	Low battery; software crash	Charge the device for at least 30 minutes. If unresponsive, perform a forced restart by holding the Power button for 10-15 seconds.
Battery drains quickly	Background apps; high screen brightness; network issues	Close unused apps, reduce screen brightness, disable unnecessary features (Bluetooth, GPS, Wi-Fi) when not in use. Check for software updates.
Poor call quality / No sound	Network signal; speaker/microphone obstruction; software glitch	Check network signal strength. Ensure speakers/microphones are not blocked. Restart the phone. Test with headphones.
Apps crashing or freezing	Insufficient RAM; app bugs; outdated software	Close background apps. Clear app cache/data. Update the app or the phone's operating system.
Fingerprint sensor not working	Dirty sensor; unregistered fingerprint; software issue	Ensure your finger and the screen are clean and dry. Re-register your fingerprint. Restart the device.

If problems persist, consider backing up your data and performing a factory reset (Settings > System > Reset options > Erase all data). This will erase all data on your phone, so proceed with caution.

5. TECHNICAL SPECIFICATIONS

Below are the key technical specifications for the VIVO V60 5G (Auspicious Gold, 8GB RAM, 256GB Storage) model:

Feature	Detail
Model Name	V60
Operating System	Funtouch OS 15
Processor	Snapdragon 7 Gen 4 Mobile Platform (4 nm)
RAM	8GB (LPDDR4X)
Internal Storage	256GB (UFS 2.2)
Display	17.20 cm (6.77 inch) Slim Quad Curved AMOLED, 2392 x 1080 resolution, 120Hz Refresh Rate, 5000 nits peak local brightness, P3 wide colour gamut, SGS Low Blue Light certified
Rear Camera	50 MP ZEISS OIS Main Camera, 50 MP ZEISS Super Telephoto Camera, 8 MP ZEISS Ultra Wide-Angle camera
Front Camera	50 MP ZEISS Group Selfie Camera
Battery Capacity	6500 mAh (Li-ion)
Charging	90W Flash Charge (USB 2.0)
Dimensions (LxWxH)	16.4 x 7.7 x 0.8 cm
Weight	200 g
Connectivity	5G + 5G Dual SIM Dual Standby, Bluetooth 5.4, Built-In GPS
Water Resistance	IP68 and IP69 Certified
Security	In-display optical fingerprint sensor
Color	Auspicious Gold

6. WARRANTY AND SUPPORT

Your VIVO V60 5G smartphone is covered by a manufacturer's warranty. For detailed information regarding warranty terms, conditions, and duration, please refer to the warranty card included with your product or visit the official VIVO India website.

6.1 Customer Support

For technical assistance, service requests, or any inquiries not covered in this manual, please contact VIVO customer support:

- **VIVO Official Website:** www.vivo.com/in (or relevant regional website)
- **Service Center Locator:** Visit the VIVO website to find an authorized service center near you.
- **Customer Service Hotline:** Refer to the VIVO website or product packaging for the latest contact numbers.

When contacting support, please have your device's model number (V60) and serial number ready. The serial number can usually be found in Settings > About phone > Status, or on the product packaging.

© 2025 VIVO. All rights reserved. Information in this manual is subject to change without notice.

Related Documents - V60

	VIVO Y20S User Manual: Features, Specs, and Guide User manual for the VIVO Y20S smartphone. Details include 4G connectivity, 13MP+2MP+2MP camera, 8GB+256GB storage, 5000mAh battery, and NFC. Learn about dimensions and ports.
	Vivo V60 Lite Selling Benefit: Terms and Conditions and Promotions Detailed terms and conditions, financing options, trade-in programs, and promotional offers for the Vivo V60 Lite smartphone, including operator bundles and partner deals.

	vivo Phone Quick Start Guide and Overview Comprehensive guide to the vivo phone, model 1945F, covering setup, features, settings, apps, and device maintenance.
	vivo X100 Pro: Schnellstart und Bedienungsanleitung Umfassende Schnellstartanleitung und Bedienungshandbuch für das vivo X100 Pro Smartphone, das die Einrichtung, Gerätelayout, grundlegende Funktionen, Kamera, Einstellungen und Apps abdeckt.
	Vivo X80 Pro User Manual: Redefining Cinematography Explore the features of the Vivo X80 Pro, a smartphone designed for exceptional mobile photography and videography with its ZEISS co-engineered imaging system, advanced AI enhancements, and powerful performance.
	Vivo Phone Overview and Quick Start Guide A comprehensive guide to the Vivo phone, covering exterior features, keys and widgets, installation, status bar icons, home screen apps, and various settings like network, display, sound, security, and system updates.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

VIVO V60

KEEP EXPLORING MANUALS, GUIDES, AND SUPPORT DOCS.

Search model numbers, browse help resources, and jump straight into the next PDF manual or troubleshooting page without losing your place.

VIVO V60 manuals, guides

Search Manuals+

EXPLORE

Deep Search

Upload

Login

MANUALS+

Home

About Us

Privacy Policy

Login

GUIDES

Amazon Manuals

AliExpress Manuals

Video Guides

Login

FOLLOW

@manualsplus

YouTube

LinkedIn

Facebook

Login

Manuals+

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners.

SAVE MANUALS, NOTES, UPLOADS, AND QUESTIONS

Sign in with Google, X, or a passkey to keep private notes on saved manuals, track public uploads, and revisit questions you posted.

Open login options

Privacy Policy · DMCA