

RINSING

Rinsing

Rinse with water-filling

- Put the laundries into the wash tub. Select suitable wash program according to the laundries.
- Adjust the water level
Set the water level with water level adjusting lever according to the laundries quantity. Then fill suitable water continuously.
- Rinse
Adjust the wash timer to 5-7 minutes to do rinsing.
(Repeat the midway spinning and rinsing with stored water for 2-3 times)

Rinse with stored water

- Put the laundries into the wash tub. Select suitable wash speed according to the laundries.
- Fill water to preset water level.
- Rinse
Adjust the wash timer to 2-3 minutes to do rinsing.
- When the laundries quantity is a few, please use "Standard" Wash program. If you use "Strong" Wash program, it may splash.

SPINNING

Spinning

- Install the machine on flat and rigid surface only.
- Do not keep wet clothes on panel. Water may enter electrical parts and can create electric shock. Make sure of earth connecting before using washing machine
- Put the laundries into the spin tub evenly and smoothly.
- Press the spinner cap in the tub properly. Close the inner and outer cover of the spin tub.
- Turn off water supply before spin time selection. Select suitable spin time according to the laundries and do spinning
- Do not put your hand in spin dryer until it have completely stopped.
- During Spinning, if there is abnormal sound, it is generallyly due to slanting placement of the laundries. Please stop the machine & re-order the laundries. Open the lid and put laundry one by one in spin tub and put spinner cap on laundry.
- In Spinning, it will pause the work if you open the outer cover of spin tub. Close it to resume to spinning.

DISPOSAL AFTER WASHING

- After using the machine, please clean the lint and foreign materials of the lint filter and over flow filter in time. Otherwise it may result in lint deposition on washed clothes.
- Please first pull off the power plug from the receptacle before cleaning.

PACKING LIST

Name	Quantity	Description
● User's manual	● One piece	In Accessories Bag
● Warranty manual	● One piece	Attached In User Manual
● Water inlet hose	● One piece	In Accessories Bag
● Lint filter or Magic Filter	● One piece	Fitted in Machine
● Spinner Cap	● One piece	In Accessories Bag
● Twin Tub Washing Machine	● One set	

SPECIFICATION

Capacity Series	Water Level / Water Quantity	Injection Pressure (MPa)	Rated Voltage	Frequency	Wash / Spin Capacity
HTW65-187 Series	Max. 48L, Med. 41L, Min. 33L	0.02 - 0.2	220V ~ 50Hz		6.5kg / 4.5kg
HTW65/70-1187 Series	Max. 56L, 5/50L, 4/45L, 3/40L, 2/35L, 1/30L	0.02 - 0.2	220V ~ 50Hz		6.5kg/7.0kg/ 4.5kg
HTW70-178/186 Series	Max. 56L, 5/50L, 4/45L, 3/40L, 2/35L, 1/30L	0.02 - 0.2	220V ~ 50Hz		7.0kg / 4.5kg
HTW85-186/1159 series	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		8.5kg / 6.0kg
HTW90-178	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		9.0kg/6.0kg
HTW75-1169 Series	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		7.5kg/6.0kg
HTW80-178/186 Series	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		8.0kg/6.0kg
HTW90-1159 Series	Max. 89L, Med. 76L, Min. 65L	0.02 - 0.2	220V ~ 50Hz		9.0 kg / 6.0 kg
HTW90-1128 Series	Max. 89L, Med. 76L, Min. 65L	0.02 - 0.2	220V ~ 50Hz		9.0 kg / 6.0 kg
HTW95-178 Series	Max. 89L, Med. 76L, Min. 65L	0.02 - 0.2	220V ~ 50Hz		9.5 kg / 6.0 kg
HTW95-186 Series	Max. 89L, Med. 76L, Min. 65L	0.02 - 0.2	220V ~ 50Hz		9.5 kg / 6.0 kg
HTW100-178 Series	Max. 89L, Med. 76L, Min. 65L	0.02 - 0.2	220V ~ 50Hz		10.0 kg / 6.0 kg
HTW80-1159 Series	Max. 80L, 4/70L, 3/60L, 2/50L, 1/40L	0.02 - 0.2	220V ~ 50Hz		8.0kg / 6.0kg
HTW85-178 Series	Max. 80L, 4/70L, 3/60L, 2/50L, 1/40L	0.02 - 0.2	220V ~ 50Hz		8.5kg / 6.0kg
HTW80-1128 Series	Max. 80L, 4/70L, 3/60L, 2/50L, 1/40L	0.02 - 0.2	220V ~ 50Hz		8.0kg / 6.0kg
HTW80-1169 Series	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		8.0kg / 6.0kg
HTW75-178 Series	Max. 55L, Med. 40L, Min. 26L	0.02 - 0.2	220V ~ 50Hz		7.5kg / 4.5kg
HTW75-1169 Series	Max. 55L, Med. 40L, Min. 26L	0.02 - 0.2	220V ~ 50Hz		7.5kg / 4.5kg
HTW85-178BKN /BBK	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		8.5kg / 6.0kg
HTW85-178G	Max. 88L, 5/80L, 4/71L, 3/62L, 2/54L, 1/48L	0.02 - 0.2	220V ~ 50Hz		10.0 kg / 6.0 kg
HTW100-178BKN	Max. 88L, 5/80L, 4/71L, 3/62L, 2/54L, 1/48L	0.02 - 0.2	220V ~ 50Hz		10.0 kg / 6.0 kg
HTW110-178 Series	Max. 88L, 5/80L, 4/71L, 3/62L, 2/54L, 1/48L	0.02 - 0.2	220V ~ 50Hz		11.0 kg / 6.0 kg
HTW90-178 FL	Max. 88L, 5/80L, 4/71L, 3/62L, 2/54L, 1/48L	0.02 - 0.2	220V ~ 50Hz		9.0kg/6.0kg
HTW85-186BBK	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		8.5kg / 6.0kg
HTW85-178FL/LBK	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		8.5kg / 6.0kg
HTW90-186	Max. 79L, 5/73L, 4/66L, 3/60L, 2/53L, 1/47L	0.02 - 0.2	220V ~ 50Hz		9.0kg/6.0kg


* Refer Specification as per model series

CLEANING THE LINT & MAGIC FILTER

Cleaning the lint & Magic Filter

- It must be cleaned in time after each using.
- Take off the lint filter
Put hand at the indicated position. Push down to take it off.(See to Figure 1)
Pull the lower end of lint filter rear cover outward to disassemble it from the lint filter front cover.
Remove lint completely with clear water.
Magic Filter Models:


Model	Magic Filter
HTW85-186/1159 Series	Yes
HTW90-178/186 Series	Yes
HTW75-1169 Series	Yes
HTW80-178/186 Series	Yes
HTW90-1159 Series	Yes
HTW90-1128 Series	Yes
HTW95-178 Series	Yes
HTW95-186S Series	Yes
HTW100-178 Series	Yes
HTW80-1159 Series	Yes
HTW85-178 Series	Yes
HTW80-1128 Series	Yes
HTW80-1169 Series	Yes
HTW75-178 Series	Yes
HTW75-1169 Series	Yes
HTW85-178BKN /BBK	Yes
HTW110-178 Series	Yes
HTW90-178 FL	Yes

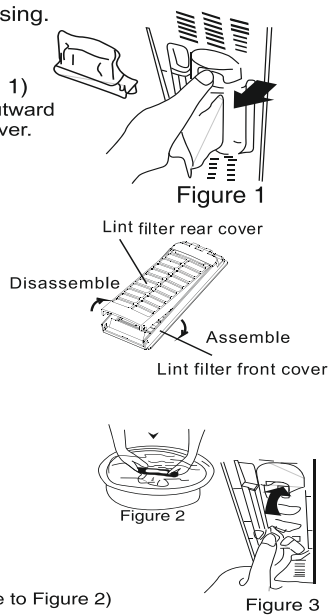

- Clean the lint
Put it in water and clean while it is still wet. (See to Figure 2)
- Install the lint filter
After cleaning,insert the bottom of the lint filter (marked with "down side") into the overflow filter. then push the upper part of the filter in (marked with "up side"). (See to Figure 3)


CLEANING THE OVER FLOW FILTER

- Too much lint on the overflow filter will influence the normal usage of the machine. Please clean it regularly.
- Take off the overflow filter.
As indicated in the figure, nip the elastic fixing claw and pull it to the direction of the arrow to take it off.
- For fixing overflow filter, first align overflow filter from opposite side of elastic fixing claw, and then press elastic fixing claw to fix overflow filter properly.



Cleaning the overflow filter

- Pull overflow filter outside for cleaning.
- Take off the corrugation pipe.
Dismantle the upper part of the corrugation pipe inside the overflow filter (as indicated in Figure1)
- Cleaning the overflow filter.
Clean the lint around the filter and surrounding visible area, flush with tap water.
- Install the overflow filter.
(a)Install the corrugation pipe.
(b)Insert the mounting plate at the bottom of the filter into the valve cover.
(c) Hang up the hook at the left upper side.
(d)Push the upper part in as indicated in Figure 2.



Disposal of the complete unit

- Wipe the complete unit with soft cloth twisted dry.
 - Wipe with neutral detergent if too dirty.
 - Do not wash it directly by water.
- Alcohol Neutral detergent Bleach
- After washing, dismount the water inlet hose.
- Do not store water in the tub for long period. Discharge the water immediately after each using.
 - Pull off the power plug and hang up the power cord.
 - Hang up the drain hose. Wipe off the water drops on the surface and inside the tub with clean soft cloth.
 - Open the cover of the wash tub and the inner/outer cover of the spin tub for some time (about one hour), then close them.

TROUBLE-SHOOTING GUIDE

If the laundries fall to the outer side of the spin tub

If the laundries fall to the outer side of the spin tub, please take them out immediately.

When the remained water is frozen

- Prevent the freezing(be sure to discharge the water completely after using)
 - After complete draining, set the " WASH SELECTOR" at "STRONG" or "STANDARD". If it is set at "DRAIN", it will be rather difficult for the frozen water to melt.
- When the water is frozen
Pour hot water below 50°C into the wash tub to soak it completely. Then turn the pulsator with hands gently. Please confirm the drainage can work normally before next using.



Phenomena

The machine does not act.

The reason

- Is there power failure?
- Is the power plug loose?
- Is the pulsator twisted by foreign materials?

The draining does not work.

- Is the drain hose put down?
- Is the drain hose frozen?
- Is the drain hose blocked by foreign material?
- Are there laundries falling to the outer side of the spin tub?

There's abnormal sound during washing

- Are there hair pin, coins or metal items brought inside the tub?

There's abnormal sound and violent vibration during spinning.

- Is the machine slanting?
- Is the spinner cap pressed evenly?
- Are there laundries falling to the outer side of the spin tub?
- Are the laundries in spin tub too much?

There may be some water flowing out of the drain hose in the first use of the machine.

Customer/end-user responsibility

- Consumers shall ensure that their end of life product-waste is channeled through collection center or dealer of the authorized producer or dismantler or reseller or through the designated take back service provider of the producer to authorized dismantler or reseller.
- Consumers shall ensure that such end-of-life electrical and electronic equipment are not admixed with e-waste containing radioactive material.

Bulk Consumer Responsibility-

- Bulk consumers of electrical and electronic equipment shall ensure that e-waste generated by them is channeled through collection center or dealer of authorized producer or dismantler or reseller or through the designated take-back service provider of the producer to authorized dismantler or reseller.
- Bulk consumer of electrical and electronic equipment shall ensure that such end-of-life electrical and electronic equipment are not admixed with e-waste containing radioactive material as covered under the provisions of the Atomic Energy Act, 1962 (33 of 1962) and rules made thereunder.
- Bulk consumer of electrical and electronic equipment listed in Schedule I shall maintain records of e-waste generated by them in Form-2 and make such records available for scrutiny by the concerned State Pollution Control Board.
- Bulk consumers of electrical and electronic equipment listed in Schedule I shall file annual returns in Form-3 to the concerned State Pollution Control Board on or before the 30th day of June following the financial year to which the return relates.
- In case of the bulk consumer with multiple offices in a State, one annual return combining information from all the offices shall be filed to the concerned State Pollution Control Board on or before the 30th day of June following the financial year to which the return relates.

Haier's Responsibility

Haier India being a responsible and trustworthy brand is taking all the necessary and expected steps for the betterment of the environment as well as living beings. Haier had joined hands with number of regulators to ensure environment-friendly recycling of the electronic items, such as refrigerators, air conditioners, washing machines, air conditioners, etc. that are either achieved their end of life or are old, unusable, etc. Apart from above, Haier had taken the following steps for proper recycling of e-waste of its customers:

- Collection and Channelization of e-waste:- Haier had setup toll free Number where the customers can call and registered their products for recycling. As soon as e-waste pick up is registered by the customer a representative will come to collect the product.
- Channelizing & Recycling of e-waste:- Haier has appointed a number of recyclers who are the leading name in the recycling industry to responsibly and in an environment-friendly manner recycle the e-waste generated in India.
- Awareness for e-waste:- Haier is actively sharing Infographics & engagement posts on social platforms to create more awareness about e-waste and its hazards.

In addition Haier is also conducting awareness programs in Schools, RWAs, Office Clusters etc to create awareness.

Collection Centre maintained by M/s WEEE- PRO Resource Recovery Solutions Private Limited (as on date)			
STATE	ADDRESS	CONTACT PERSON	CONTACT NUMBER
Andhra Pradesh	Shop No. 6/1, Block A/4, Near Jain Temple, Hyderabad-500026	Mr. Ajith	963388977
Assam	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Bihar	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Chennai	Shop No. 6/1, Block A/4, Near Jain Temple, Hyderabad-500026	Mr. Ajith	963388977
Delhi	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Gujarat	Shop No. 6/1, Block A/4, Near Jain Temple, Hyderabad-500026	Mr. Ajith	963388977
Haryana	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
India	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Karnataka	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Kerala	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Madhya Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Marharastra	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Odisha	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Punjab	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Rajasthan	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Tamil Nadu	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Uttar Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
West Bengal	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Goa	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Kerala	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Madhya Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Marharastra	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Odisha	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Punjab	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Rajasthan	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Tamil Nadu	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Uttar Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
West Bengal	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Goa	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Kerala	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Madhya Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Marharastra	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Odisha	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Punjab	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Rajasthan	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Tamil Nadu	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Uttar Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
West Bengal	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Goa	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Kerala	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Madhya Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Marharastra	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Odisha	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Punjab	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Rajasthan	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Tamil Nadu	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Uttar Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
West Bengal	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Goa	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Kerala	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Madhya Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Marharastra	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Odisha	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Punjab	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Rajasthan	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Tamil Nadu	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Uttar Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
West Bengal	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Goa	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Kerala	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Madhya Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Marharastra	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Odisha	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Punjab	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Rajasthan	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Tamil Nadu	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Uttar Pradesh	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
West Bengal	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Goa	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404000
Kerala	14/1, Kailash Nagar, Guwahati-781005	Mr. Sarwan	965404

