



# Instruction Handbook for Installation, Operation and Maintenance.





#### **Dear Customer**

Welcome to the world of KENT, leaders of the water purification industry in India. With a KENT product, you have all the reasons to smile, since at KENT we take pride in the quality and laboratory-tested performance of our products.

We are confident that your decision to own the KENT Maxx Star will go a long way in serving you with purer and healthier drinking water – thus keeping you and your family in good health. We assure you that you will be satisfied with its trouble-free performance, and quality which comes without any compromise.

This manual is an effort towards familiarizing you with the operation and maintenance of the KENT Maxx Star. Before operating the unit, please read the manual thoroughly and retain it for future reference. To ensure that the warranty of your water purifier is effective, please fill up the enclosed warranty card and send the installation report within 15 days of purchase. Should you need further assistance, do not hesitate to contact your nearest KENT dealer or branch.

**Best Wishes** 

KENT RO SYSTEMS LTD.



# **Table of Contents**

1.	Introduction	
2.	Salient Features of the KENT Maxx Star	1
3.	Items in the Box	1
4.	Important Instructions	2
5.	UV Process	3
6.	UF Process	3
7.	Computer Controlled Operation	3
8.	Water Flow Diagram	4
9.	Electrical Circuit Diagram	4
10.	UV LED Failure Alarm	5
11.	UV Fail Alarm	5
12.	Filter Change Alarm	5
13.	Installation Instructions	6
14.	Starting-up the Purifier	7
15.	Maintenance	7
16.	Cleaning the Water Tank	7
17.	Important Safety Instructions	8
18.	Technical Specifications	8

## Introduction

KENT proudly presents the KENT Maxx Star - the new advanced fully automatic UV purifier with a storage tank.

The innovative KENT Maxx Star, developed at KENT laboratories, provides the double purification of UV+UF. While the initial purification by UV deactivates bacteria and viruses, the double purification by the fine pores of the Hollow Fibre UF Membrane reduces them from the purified water. The Activated Carbon Pre-filter reduces bad taste and odour, so that the water you drink is healthy, safe and tasty.

It has UV LED disinfection light in storage tank that keeps purified water pure.

#### Salient Features of the KENT Maxx Star

- Water purifier with in tank UV protection
  Purified water storage tank with 7L
- Wall-mounted design, best suited for domestic purposes
- Double purification, first by UV followed by Hollow Fiber UF Membrane-filters out bacteria, viruses and even cysts
- Fully automatic operation with auto-on and auto-off facility
- Computer Controlled Operation with Filter Change Alarm and UV Fail Alarm
- Detachable tank for easy on-site cleaning

- Purified water storage tank with 7L capacity
- LED indicators for power on and purification process on display
- Tamper-proof UF Membrane fused inside membrane housing
- Push-fit components give leak-proof & maintenance-free performance
- Mounted SMPS for over voltage protection
- ABS material construction for corrosionfree life span
- Ideal for tap/municipal water supply

## Items in the Box

1. KENT Maxx Star : 01 No.

2. 3-Way Connector : 01 No.

3. S.S. Ball Valve : 01 No.

4. Food Grade Pipe ¼ inch (White) : 2.5 Meters

5. Screws & Plastic Inserts : 02 Nos. each

6. Instruction Manual : 01 No.


7. Center Drill Sticker : 01 No.


# **Important Instructions**




Avoid exposure to direct sunlight and installation in damp areas.



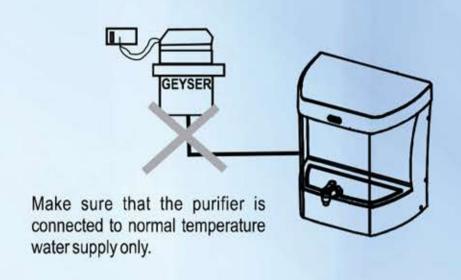

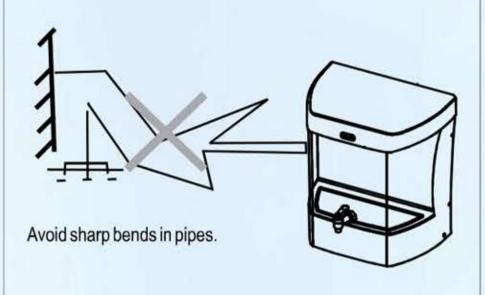


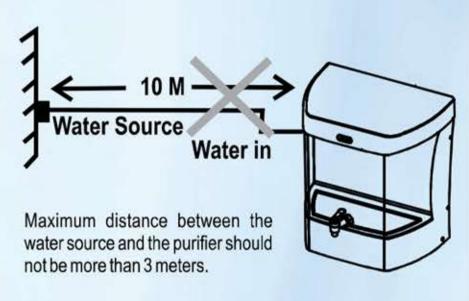





In case the purifier is not to be used for more than two days, switch off the power supply and drain the storage tank.

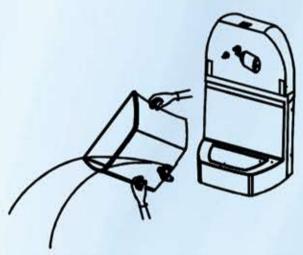

To keep the storage tank clean, it should be removed, drained and wiped dry, once in 15 days.





Use Genuine KENT spares for optimum performance.






Do not try to service the purifier on your own. Instead, call the service technician for help.

#### **UV Process**

Ultra Violet (UV) rays are high energy rays a wavelength shorter than that of visible light. They are called ultraviolet because they are just beyond violet light in the spectrum. Technically, ultraviolet light is defined as any wavelength of light which is shorter than 400 nanometer.

When transmitted into water, UV radiation is absorbed by the DNA of pathogens. These UV rays alter the DNA of these pathogens in such a way that they lose the ability to reproduce, multiply and infect. Thus, they are essentially killed and cannot cause infection. This process of DNA modification is known as inactivation.

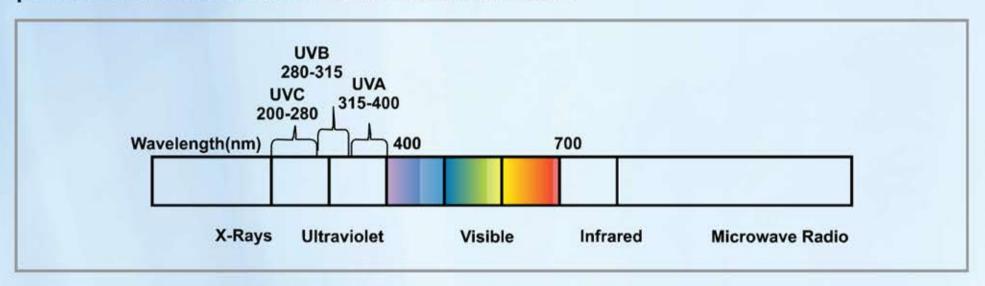

#### **UF Process**

Ultra Filtration is a separation process that uses membranes with a pore size of 0.1 microns. The UF membrane has the capacity to reduce colloidal material including bacteria and cysts from drinking water. Low applied pressure is therefore sufficient to achieve high flux rates from an Ultra Filtration Membrane.

## **Computer Controlled Operation**


To ensure the delivery of purer and healthier water, a micro processor is installed in the purifier to performs the following functions:-

UV Stabilisation Delay: To ensure that the UV lamp is pre-heated and is working at its optimum before it starts disinfecting water, the controller provides a two second delay to the UV lamp when a purifier is switched on. During this period, only the UV lamp is on and all other electrical devices of the purifier are switched off and no water flows through.


Purification Delay: To ensure that the water lying idle in the internal pipes and the UV chamber is thoroughly disinfected before being passed onto the storage tank, the system provides approximately 5 seconds of Purification Delay when the purifier is switched on. During this period, all electrical devices except the UV lamp are switched off and the UV lamp kills the micro organisms present in the water inside the UV chamber. After this delay, all other electrical devices such as solenoid valve etc., get activated and the normal purification process starts.

Audible Alarm: The microprocessor also controls the activation of the UV Fail Alarm and Filter Change Alarm.

# **Water Flow Diagram**

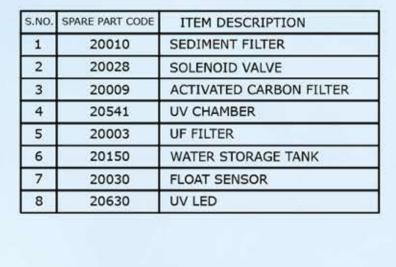


Raw Water ⇒

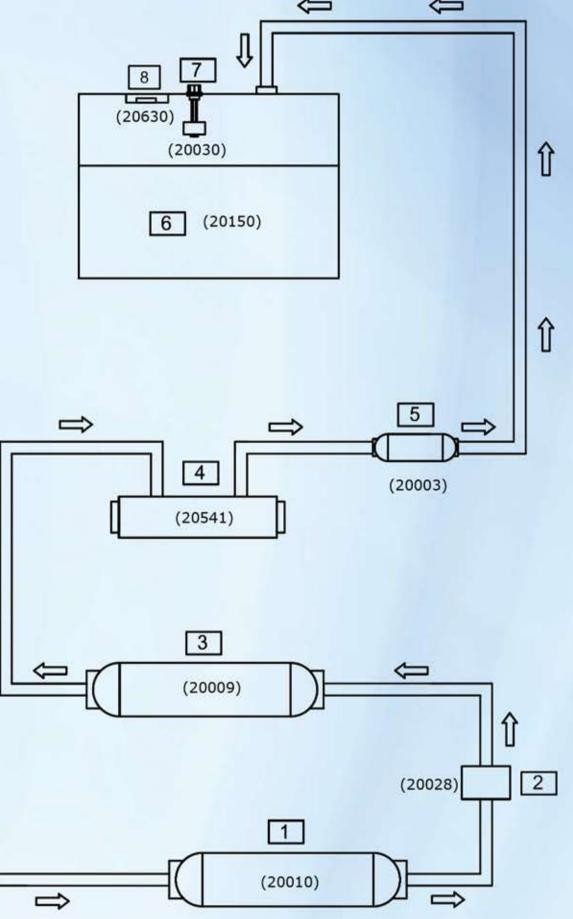

# **Electrical Circuit Diagram**

Û

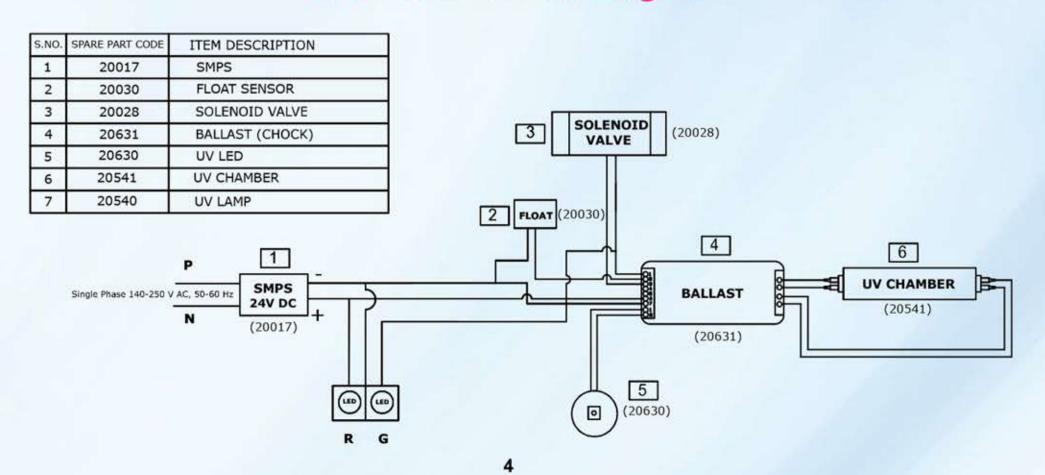

#### **UV LED Failure Alarm\***






In case such an alarm is audible, call KENT service for LED replacement.

#### **UV Fail Alarm**

To ensure purer water throughout the service cycle, KENT Maxx Star is equipped with an in-built UV Fail Alarm which gets activated in the event of UV lamp failure. In case the UV lamp malfunctions, the purification process automatically stops and the purifier starts emitting a short beep at an interval of every 2 seconds.



Under such circumstances, please switch off the purifier and call the service technician for help. The purifier will stop purification in such a situation.

## **Filter Change Alarm**

KENT Maxx Star has an in-built feature that sounds an alarm to indicate the replacement time of filters. This alarm is audible after 700 hrs of filter use. The Filter Change Alarm works as follows:

Gives 4 short beeps every two seconds, lasting upto 30 seconds. The alarm gets activated after every 2 hours of use.



Please call the service technician once the Filter Change Alarm is activated and get the filters replaced. In case the filters are not replaced within the next 60 hours of operation, the purifier stops functioning to avoid the delivery of impure water and beeps continuously.

Under such circumstances, the purifier will not function unless the filters are changed.

## **Installation Instructions**


KENT Maxx Star is a convenient and easy-to-install wall mounting model.

#### Recommended Site Preparations:

- Single Phase 140-250 V AC, 50-60 Hz. supply not more than 3 m away from the point of installation
- Raw water supply with ½ inch nipple not more than 3 m away
- Installation space as per the dimensions of the purifier
- Wall/plane surface for mounting screws and holding the machine. Avoid installation on wooden and metallic stands
- For optimum inlet pressure, the source water tank should be at least 10ft above the purifier installed
- Install the purifier near a sink for easy availability of inlet water lines
- The system and installation must comply with applicable state and local laws & regulations

#### Installation Procedure:


- 1. Screw in two 10x50 self taping screws, 4 inches (100 mm) apart horizontally.
- 2. Wall-mount the purifier with the help of the slot holes given on the back.

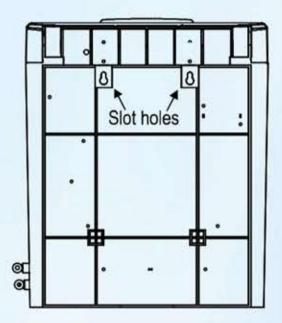

3. Fasten the SS ball valve to ¼ inch port of 3-way connector.



 Attach the threaded end of the 3-way connector to the raw water supply and plug off the other end or connect to a tap.



- Now connect one end of the pipe to the SS ball valve and other end to the elbow fitting connector labeled as WATER IN, on the left side of purifier.
- 6. Turn on the lever given on the SS ball valve to initiate water flow to the purifier.

- 7. Allow the filters to pre-soak in water for 2-3 minutes.
- 8. Connect the power supply.
- 9. Installation is complete.



## Starting-up the Purifier

- Switch on the power supply
- Allow the storage tank to fill up to the maximum level
- Switch off the power supply
- Open the upper cover. Lift and drain the storage tank so as to remove the
- residual dust particles initially present in the pipes and storage tank
- Place the storage tank back and close the upper cover
- Switch on the power supply
- Purifier is ready to use



Note: The glowing red LED indicates the power is on. The glowing green LED indicates the purification process is on.

#### Maintenance


To ensure that the purifier operates at its BEST, routine maintenance must be performed. The frequency of maintenance will greatly depend upon the raw water quality and consumption of purified water.

- Storage tank must be cleaned once in a week. (Refer Cleaning the Water Tank Pg. 7)
- In the event of not using purifier for more than two days (while going on a holiday, tour etc.), turn off the raw water supply and drain the storage tank
- Replace the sediment filter and carbon filter once in an year
- Replace the UF membrane once in a year



The replacement time of consumables such as filters and membrane is dependent on the quality of raw water and water consumed.

## **Cleaning the Water Tank**

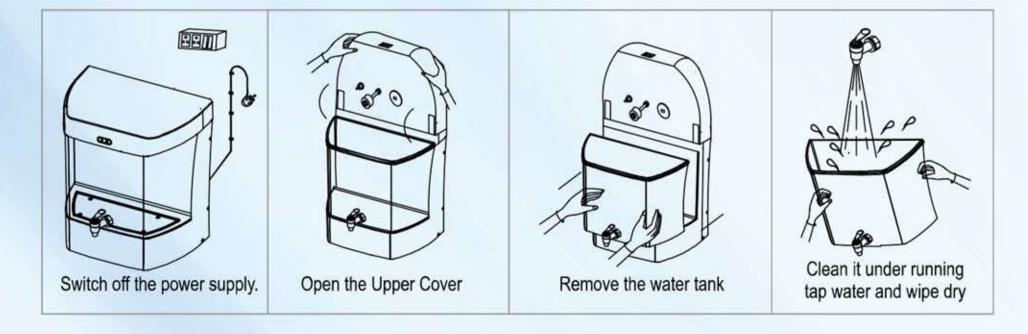

Recommended Frequency for Filter/Membrane change

Sediment/Carbon → Once every year or earlier if it gets clogged

UF Membrane → Once every year or earlier if it gets clogged


UV Lamp → Once every year

## **Important Safety Instructions**

- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid hazard
- Children should be supervised to ensure that they do not play with the appliance
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety

## **Technical Specifications**

rediffical opeomoations	
Product	KENT Maxx Star
Product Code	11086
Product Generic Name	Water Purifier
Product Colour	White
Applications	Ideal for Tap/Municipal water supply
Purification Production Rate	60L/hr. (depending on inlet water pressure)
Body Material	ABS Food Grade Plastic
Installation	Wall-mounting/Counter-top
Dimensions (mm)	390 (L) x 285 (W) x 400 (H)
Weight	6.10 kg
Purified Water Tank Capacity	7L
Inlet Water Pressure/Temp (min)	0.3 kg/cm² /10°C
Inlet Water Pressure/Temp (max)	4 kg/cm²/40°C
Filter Cartridge	Sediment, Activated Carbon, UF
UF Membrane Pore Size	0.1 Micron
UV Lamp Wattage	11W
Life of UV Lamp	5000 hrs. of operation
UV LED Wattage	0.7 W
Voltage Output of SMPS	24V DC
Total Power Consumption	36 W
Input Power Supply	Single Phase 140-250 V AC, 50-60 Hz.

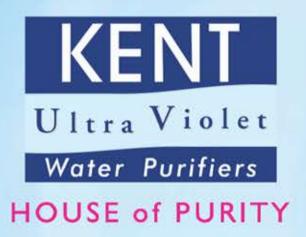















Marketed by: KENT RO SYSTEMS LTD.

E-6, 7 & 8, Sector-59, Noida, U.P.-201 309, India. E-mail: sales@kent.co.in | Website: www.kent.co.in

#### Manufactured by: KENT RO SYSTEMS LTD.

- 1. Khasra No. 93, Village-Bantakhedi, Tehsil-Roorkee, District-Haridwar, Uttarakhand - 247 668, India.
- 2. A-6, Sector-87, Noida-201 305, U.P., India.

For customer complaints, contact Customer Care Officer at: E-6, 7 & 8, Sector-59, Noida, UP-201 309, India. Call: 92-789-12345 E-mail: service@kent.co.in or visit us at www.kent.co.in